

PXIe-3352

Rubidium/GPS Frequency Standard

The Astronics Test Systems PXIe-3352 frequency standard module sets a new standard for high density functionality in a PXI module by combining a Rubidium oscillator with a GPS receiver into a single, compact instrument.



Product Information

The PXIe-3352 is a Rubidium/GPS module for use in PXI hybrid and PXI Express slots in a PXI mainframe. It provides a basic accuracy of $5e^{-11}$ in free-run mode, but, given an external GPS antenna (not included) and a view of the sky, can be disciplined to GPS satellites for improved timing accuracy.

GPS Disciplining

The PXIe-3352 uses the 1PPS output from a GPS receiver to discipline the Rubidium oscillator. This technique results in improved long-term stability comparable to that of a Cesium frequency standard.

External DC Power Supported


If the PXI mainframe is powered down, power may still be applied to the Rubidium oscillator via a front panel external DC power input. This keeps the Rubidium oscillator very stable over time and eliminates the effects of retrace. The GPS receiver maintains its location information during power down, saving the time it takes for the receiver to do a position fix, because it has an internal battery to power its SRAM and real time clock.

Rubidium Oscillator Control

Control of the Rubidium oscillator is available to enable or disable outputs or to query it for information such as serial number,

KEY FEATURES

- Dual width PXI Express module for highest possible system density
- Sine and square wave outputs provided
- Rubidium oscillator can run freely or lock to a built-in GPS receiver
- External power input keeps Rubidium oscillator powered during system shutoff

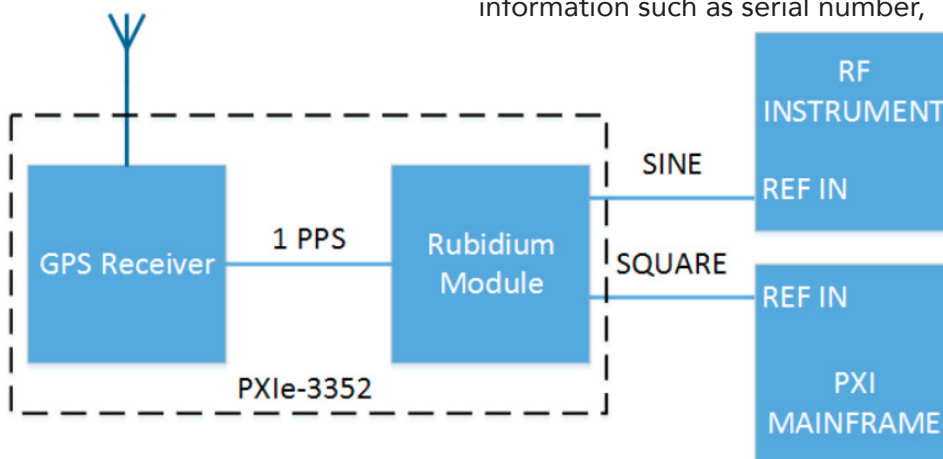

PXIe-3352 System Configuration Example

operating hours, operating temperature, event history, self-test and other performance indicators.

Holdover

When GPS satellites are not available, the system performance reverts to that of a stand-alone Rubidium (this period is called the holdover period).

Specifications

Note: The Astronics Test Systems policy is one of continuous development and improvement. Consequently, the equipment may vary in detail from the description and specifications in this publication.

Output Characteristics

Output Frequency

- 10 MHz

Output Channels

- Sinewave Output Channel
- Squarewave (CMOS) Output Channel

Amplitude

- Sine Wave: 10 dBm \pm 2 dBm into 50 Ω
- CMOS: 2.5 V into 10 k Ω

Phase Noise (sine output)

- 10 Hz offset: -102 dBc/Hz
- 100 Hz offset: -135 dBc/Hz
- 1 kHz offset: -145 dBc/Hz
- 10 kHz offset: -150 dBc/Hz

Spectral Purity (sine output)

- Harmonics: <-44 dBc (up to 70 MHz)
- Spurious: <-80 dBc (10 Hz-100 kHz from carrier)

Timebase Characteristics

Initial Accuracy (@ 25° C)

- 5 x 10⁻¹¹

Stability

- Frequency Drift: 5 x 10⁻¹¹/month
- Frequency Retrace: < 5 x 10⁻¹¹

- Allan Variance (1 s): 3 x 10⁻¹¹
- Allan Variance (100 s): 5 x 10⁻¹²

Warm Up (@ 25° C)

- <4 minutes to lock
- <5 minutes to reach 5 x 10⁻¹⁰

GPS Receiver Characteristics

Receiver Architecture

- Tracking: 22 parallel channels
- Acquisition: 66 simultaneous satellites

Operating Frequency

- L1 (1575.42 MHz), C/A code

Receiver Sensitivity (typical)

- Tracking: -161 dBm
- Cold Start: -143 dBm

Timing Accuracy (1 pps)

- \pm 11 ns

Acquisition Time

- Hot: <1 s, typical
- Warm: <30 s, typical
- Cold: <32 s, typical

Interface

Power Requirements

- +3.3 VDC at 1.2 A
- +12 VDC at 2.5 A

Front Panel I/O and Indicators

Outputs (SMA)

- Sine Wave: 10 MHz, 10 dBm, 50 Ω
- Square Wave: 10 MHz, 2.5 V, 10 k Ω
- 1 PPS: 3.3V, 20 μ s wide

Inputs

- External Rubidium Power: 12 V @ 1.5 A
- GPS Antenna (SMA): 50 Ω
- 1 PPS (SMA): 3.3V CMOS

Status Lights

- Red: Sysfail
- Amber: Access
- Amber: Rubidium locked

Software

Driver Installations

- VXiplug&play WIN32, WIN64, LabWindows/CVI, LabVIEW, Visual Studio

Executable

- Interactive Control Soft Front Panel

Environmental

Temperature/Altitude

- Operating: 0° C to 55° C/10,000 ft
- Storage: -40° C to 75° C/15,000 ft

Relative Humidity

- 5 to 95%, non-condensing <30° C
- 5 to 75%, non-condensing <40° C

Mechanical

- Shock: 30 g, 11 ms, 1/2 sinewave
- Vibration: 0.013 in (pk-pk), 5 to 55 Hz
- Bench Handling: 4-inch drop at 45°

CE Certifications

- EMI/EMC: EN/IEC 61326-1, -2-6, -3-2, and -3-3
- Safety: EN61010-1: 2010

Mechanical

Weight

- 1.26 lbs (0.567 kg)

Dimensions

- 2 Slot Width PXI Express Module



All trademarks and service marks used in this document are the property of their respective owners.

- Racal Instruments is a trademark of Astronics Test Systems Inc. in the United States and/or other countries
- Microsoft, Visual C, Visual C++, Visual Basic and Win32 are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries
- LabVIEW and LabWindows are trademarks of National Instruments in the United States and/or other countries

ORDERING INFO

408673 : Astronics Test Systems PXIe-3352 Rubidium/GPS Frequency Standard, NI Reference: 143115A-01L

Astronics Test Systems
2652 McGaw Ave.,
Irvine, CA 92614
+1.949.859.8999 | 800.722.2528
ATSales@astronics.com
astronics.com/testsystems