



FliteStream[®] T-220

T-200 Series: Tail Mount Internet, DBS-TV, & Live TV SATCOM System

High-Performance Connectivity System

- Enjoy seamless high-speed connectivity from takeoff to touchdown.
- Browse the internet, send and receive emails, make calls using Voice-Over-IP (VoIP), access VPN services, conduct video conferences, enjoy your favorite work or entertainment applications.
- Enjoy hundreds of channels of Direct Broadcast Service television (DBS-TV).
- Provides dual capability of receiving both DBS-TV and broadband internet connectivity in a single antenna package.
- Stream your favorite internet TV channels (e.g. Hulu[®], Netflix[®]).
- Works seamlessly with laptops, tablets, and smart phones.

Robust Design

- Satellite tracking design allows for full continuous motion in azimuth and -0 to +90 degree motion in elevation.
- Provides full reception performance during aircraft flight maneuvers, even at higher latitudes.
- Antenna is mounted externally to the aircraft under a protective radome enclosure located on the aircraft tail.

Global Coverage


- With Ku-band satellite coverage, you can operate globally without settling for less.
- With Ku-band you can select from many different satellite operators. This provides flexibility and operational security.

Global Live TV

- With Panasonic eXTV, you can enjoy live TV globally even over water.
- Enjoy sports, world news, and financial news.

KEY BENEFITS

- Keeps you connected, productive & entertained.
- Global operation even over water.
- Provides high-speed internet, live IPTV, and DBS-TV.
- Enjoy Sport24, CNBC, and CNN International live TV without using monthly data allotment.
- Fits under most tail Ku-band radomes.
- Open-architecture: can operate over any Ku-band network when paired with compatible modem.

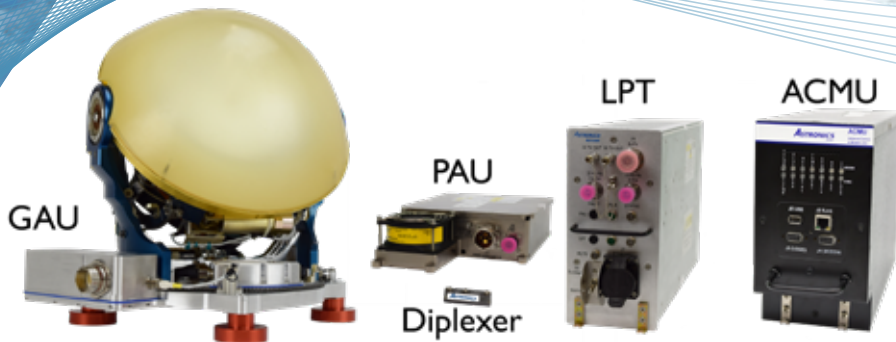

Inputs

- Power: +28 VDC
- Control Interface: [Ethernet](#)
- Navigation Interface: [ARINC 429](#)
- Discrete Interface: [WOW, Flap Position](#)

LRUs

T-220 system is composed of 5 aircraft LRU's:

1. Gimbal Antenna Unit (GAU).
2. Antenna Control & Modem Unit (ACMU).
3. Low Power Transceiver (LPT).
4. Power Amplifier Unit (PAU).
5. Diplexer.

Get Started Today

For additional details, please contact Astronics AeroSat.

220 Hackett Hill Rd.
Manchester, NH 03102
+1.603.879.0205



AeroSat.Info@Astronics.com
www.aerosat.com

Certification

- RTCA DO-160 & DO-178 compliant.
- Design based on proven technology used on multiple aircraft types.

Integrated Modems

Inquire for latest list of compatible modems.

FLITESTREAM T-220 SPECIFICATIONS

Typical Performance

GAU Aperture Size: 29cm
EIRP: 41.9 dBW (25W PAU)
G/T (15°K Sky Temperature): 11.5 dB/K @ 12.75 GHz
Receive Frequency: 10.7 GHz to 12.75 GHz
Transmit Frequency: 13.75 GHz to 14.5 GHz
Polarization: Linear Tx/Dual Pol Rx, Dual Pol Circular Rx only
Cross Polarization Rejection: 20 dB
Polarization Control: 45°±105°
Field of View: Azimuth (continuous): 360°
Elevation: +90° to -0°

Roll, Pitch, Heading Rates of Change: >12.0° / Second

Roll, Pitch, Heading Acceleration: >12.0° / Second / Second

Pointing Accuracy: <0.2°

WEIGHT:

GAU (Antenna): 23.5 Lbs (10.7 Kg)
ACMU: 14.5 Lbs (6.6 Kg) (ARINC 600 - 4 MCU)
Diplexer: 0.2 Lbs (0.1 Kg)
LPT: 13 Lbs (5.9 Kg) (ARINC 600 - 3 MCU)
PAU: 8.6 Lbs (3.9 Kg)

POWER:

LPT: 400 Watts Typical
ACMU: 75W Typical

OPERATING TEMPERATURE:

GAU: -55° to +70° C
ACMU: -40° to +70° C
LPT: -40° C to +70° C
PAU: -55° C to +70° C
Diplexer: -55° to +70° C